




MONO SOLAR MODULE 125' 235W - 265W

PRODUCT SPECIFICATION

Type Of Module	SY-235WM	SY-240WM	SY-250WM	SY-260WM	SY-265WM
Maximum Power (W)	235	240	250	260	265
Tolerance (%)	± 3%	± 3%	± 3%	± 3%	± 3%
Open Circuit Voltage (V)	58.4	58.8	59.6	60.0	60.5
Short Circuit Current (A)	5.36	5.42	5.48	5.57	5.63
Maximum Power Voltage (V)	48.2	48.4	48.6	49.1	49.5
Maximum Power Current (A)	4.88	4.96	5.15	5.29	5.35
Module Efficiency (%)	14	14.3	14.9	15.5	15.8
Solar Cell Efficiency (%)	16.2	16.5	17.2	18	18.25
Series Fuse Rating (A)	15	15	15	15	15
Terminal Box	IP65	IP65	IP65	IP65	IP65
Maximum system voltage (V)	DC1000	DC1000	DC1000	DC1000	DC1000
Operating Temperature(@)	-40@ ---85@	-40@ ---85@	-40@ ---85@	-40@ ---85@	-40@ ---85@

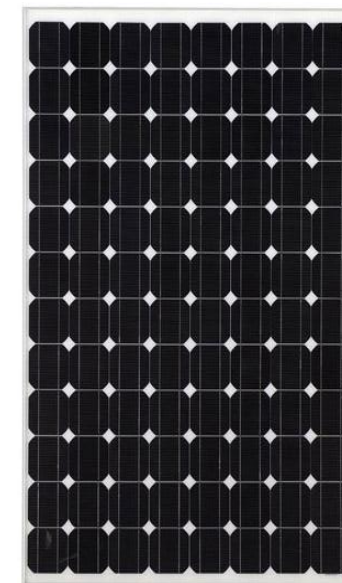

PRODUCT FEATURE


- White tempered glass, EVA resin, weather proof film and anodized aluminum frame to provide efficient protection from the severest environmental conditions.
- Waterproof and perfect for grid applications.
- Product guarantee: 5 years.
- Bypass diode minimizes the power drop by shade

Quality Assurance

- Outdoor exposure test
- Hot-spot endurance test
- UV-exposure
- Thermal cycling test
- Humidity freeze test
- Electrical Insulation test
- Robustness of terminations test
- Wet leakage current test
- Mechanical load test
- Hail impact test
- Bypass diode thermal test
- Damp heat Test

Electrical Characteristics

Current-Voltage & Power-Voltage characteristics various irradiance levels

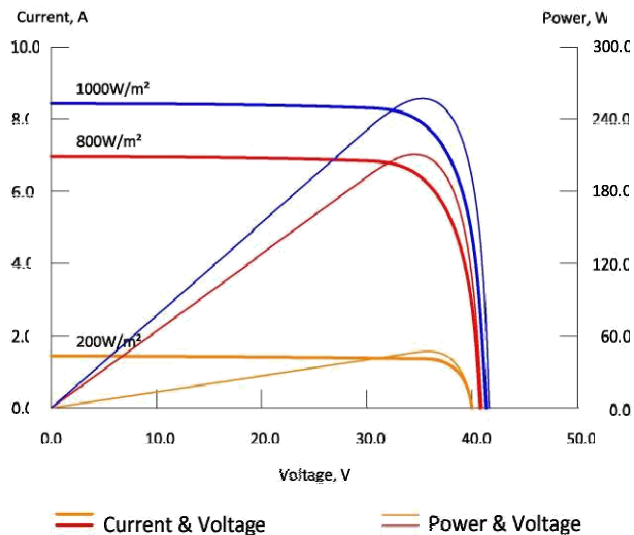

Electric Performance Typical Performance Characteristics		
Short Circuit Current Temperature Coefficient	mA/C	+2.5
Open Circuit Voltage Temperature Coefficient	V/C	-0.147
Maximum Power Temperature Coefficient	%/C	-0.4
Performance Warranty : 90%output , 12 years 80%output, 25 years		

Physical Specifications

Dimensions: 1580*1062*45mm


Weight: 20KG/PCS

Packing: 2pcs in one carton

Loading Capacity:

264 pcs / 20' Container

616 pcs / 40' Container

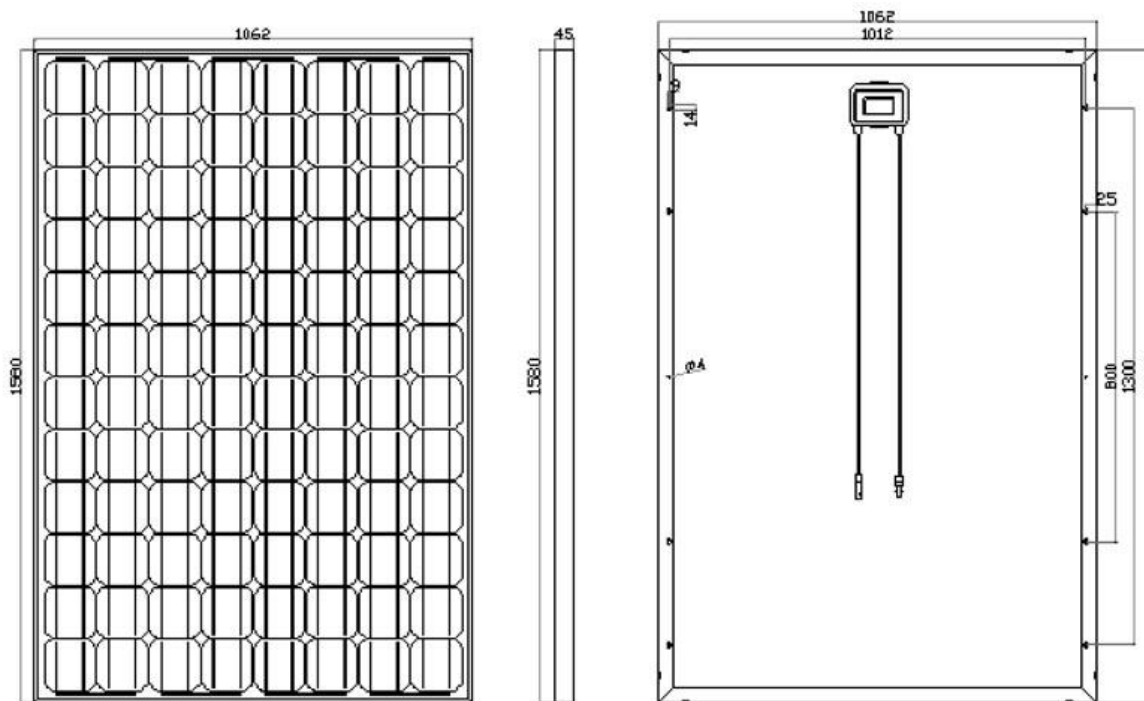

JCI Solar
 Tel: +27 (021) 552 3394
 Fax: +27 (021) 552 3794
 Email: info@jcisolar.co.za