



MONO SOLAR MODULE 125' 75W

PRODUCT SPECIFICATION

Type Of Module	SY-75WM
Maximum Power (W)	75
Tolerance (%)	± 3%
Open Circuit Voltage (V)	21.6
Short Circuit Current (A)	4.73
Maximum Power Voltage (V)	17.8
Maximum Power Current (A)	4.21
Module Efficiency (%)	13.8
Solar Cell Efficiency (%)	15.4
Series Fuse Rating (A)	15
Terminal Box	IP65
Maximum system voltage (V)	DC1000
Operating Temperature(@)	-40@ ---85@



PRODUCT FEATURE


- White tempered glass, EVA resin, weather proof film and anodized aluminum frame to provide efficient protection from the severest environmental conditions.
- Waterproof and perfect for grid applications.
- Product guarantee: 5 years.
- Bypass diode minimizes the power drop by shade

Quality Assurance


- Outdoor exposure test
- Hot-spot endurance test
- UV-exposure
- Thermal cycling test
- Humidity freeze test
- Electrical Insulation test
- Robustness of terminations test
- Wet leakage current test
- Mechanical load test
- Hail impact test
- Bypass diode thermal test
- Damp heat Test

Electrical Characteristics

Current-Voltage & Power-Voltage characteristics various irradiance levels

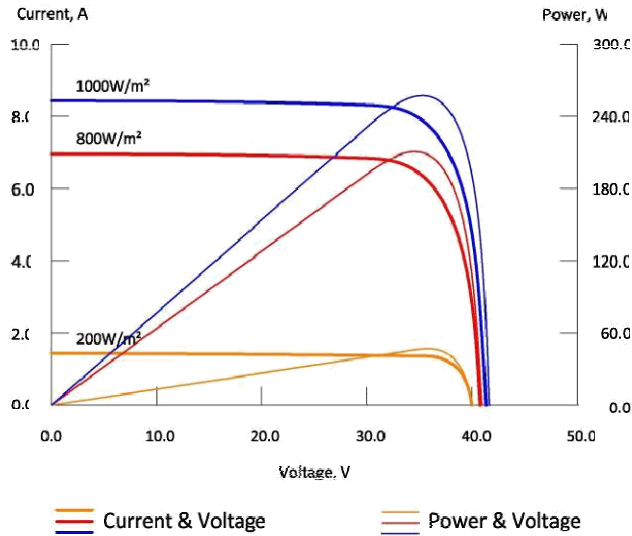

Electric Performance Typical Performance Characteristics		
Short Circuit Current Temperature Coefficient	mA/C	+2.5
Open Circuit Voltage Temperature Coefficient	V/C	-0.147
Maximum Power Temperature Coefficient	%/C	-0.4
Performance Warranty : 90%output , 12 years 80%output, 25 years		

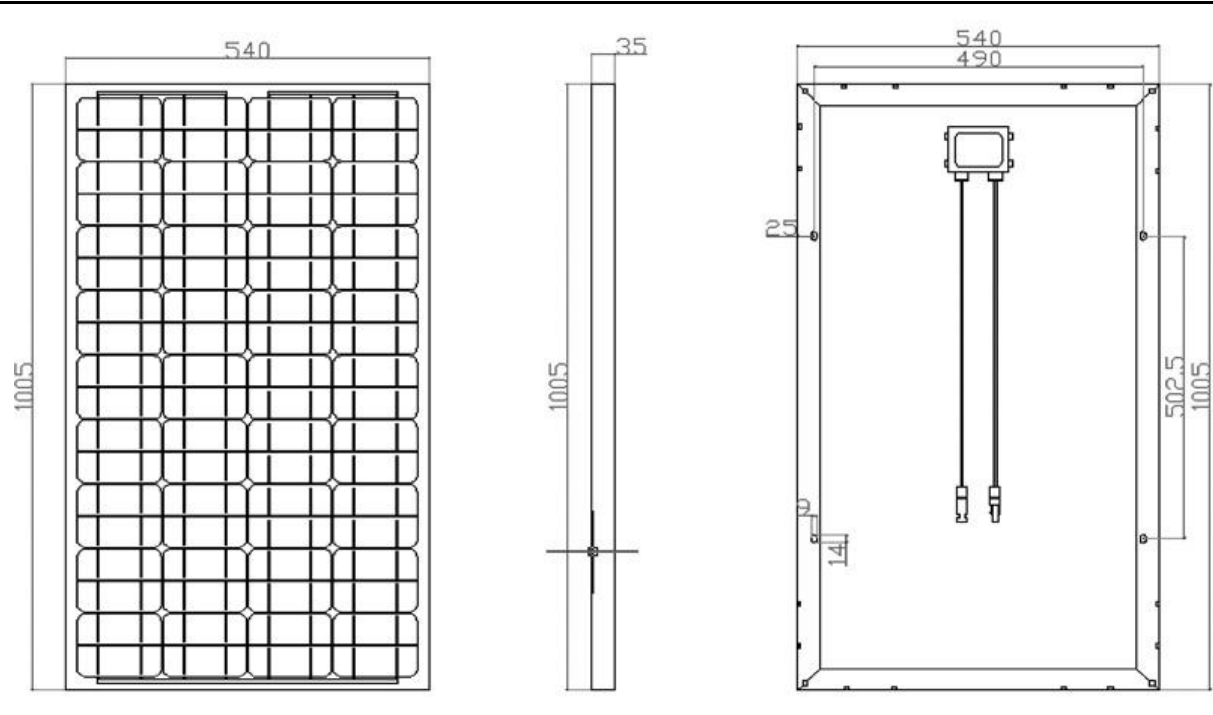

JCI Solar
Tel: +27 (021) 552 3394
Fax: +27 (021) 552 3794
Email: info@jcisolar.co.za